

Greenlee

Hand Tools	76 – 80
Hole Making	80 – 86
Bending	87
Fishing	88
Testing & Measurement	89 – 91
Storage	92 – 93

Tools, Testers, and Related Accessories from Greenlee for the Plumbing Market



Hand Tools

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at 1-800-545-7698

High Leverage Side-cutting Pliers, 9" dipped grip

Specifications

Overall Length: 9-3/8" (23.8 cm)

- Double layered vinyl handles for comfort and slip resistance
- Handles allow for easy storage of tools in pouches and tool bags
- High leverage pliers design and diamond-serrated jaws for optimum cutting and gripping performance
- Forged from chrome vanadium steel for greater durability and strength
- Precision-machined and induction-hardened blades strengthen cutters and provide consistent performance
- Effectively cuts hardened wire, ACSR, bolts, screws and nails
- Through-hardened steel for longer life



0151-09SD

• **Note:** This is not an insulated tool

Description	lb	No.
High Leverage Side-cutting Pliers, 9" dipped grip	1.13	0151-09SD

High Leverage Diagonal Cutting Pliers 8" dipped grip

Specifications

Overall Length: 8-3/4" (22.2 cm)

- Custom grip allows area for user identification
- Flared handles for added comfort and leverage
- Wider grip design provides larger load bearing area for user comfort
- Forged from chrome vanadium steel for greater durability and strength
- Precision-machined and induction-hardened blades strengthen cutters and provide consistent performance
- Effectively cuts most hardened wire, ACSR, bolts, screws and nails
- Through-hardened steel for longer life
- Dual cutting edges for optimum cutting performance
- Rugged riveted construction for smooth precise action



0251-08D

• **Note:** This is not an insulated tool

Description	lb	No.
High Leverage Diagonal Cutting Pliers 8" dipped grip	0.85	0251-08D

Long Nose Pliers/Side Cutting 8" dipped grip

Specifications

Overall Length: 8-9/16" (21.7 cm)

- Double layered vinyl handles for comfort and slip resistance
- Handles allow for easy storage of tools in pouches and tool bags
- Wider grip design provides larger load bearing area
- Forged from chrome vanadium steel for greater durability and strength
- Effectively cuts both solid & stranded copper wire
- Diamond-serrated jaws and hardened cutting edges for optimum cutting and gripping performance
- Through-hardened steel for longer life
- Exceeds ASME/ANSI specifications
- Rugged riveted construction for smooth precise action
- Lifetime limited warranty



0351-08D

• **Note:** This is not an insulated tool

Description	lb	No.
Long Nose Pliers/Side Cutting 8" dipped grip	0.64	0351-08D

Pump Pliers

Specifications

Overall Length: 10" (25.4 cm)

Adjustment Grooves: 7

Jaw Capacity: 2" (5.1 cm)

- Slip-proof, ergonomic molded grip for increased comfort and reduced user fatigue
- Wider grip design provides larger load bearing areas
- Precision-machined and through-hardened for consistent performance and longer life
- Right-angled teeth for gripping in both directions
- Riveted process ensures joint integrity
- Exceeds ASME/ANSI specifications
- Lifetime limited warranty



0451-10M

• **Note:** This is not an insulated tool

Description	lb	No.
Pump Pliers, 10" molded grip	0.83	0451-10M
Pump Pliers, 12" molded grip	1.29	0451-12M

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at 1-800-545-7698

Hand Tools



5- or 7-Piece Screwdriver Set

5-Piece Set contains: 3/16" x 6" Cabinet, 1/4" x 4" Keystone, 1/4" x 6" Cabinet, 5/16" x 6" Keystone & #2 x 4" Phillips
 7-Piece Set contains: 3/16" x 4" Cabinet, 3/16" x 6" Cabinet, 1/4" x 4" Keystone, 1/4" x 4"

- Heavy-duty construction for longer life
- Precision-machined tips for accurate fastener contact
- Strong, durable black phosphate tips prevent plate chipping and reduce slipping
- High-grade, rust resistant, chrome-plated finish
- Soft, cushioned grip for extra comfort and torque
- Painted handle end allows for easy identification of screwdriver type
- Meets or exceeds ANSI standards
- Lifetime limited warranty

• **Note:** This is not an insulated tool

Description	lb	No.
5-Piece Screwdriver Set	1.38	0153-01C
7-Piece Screwdriver Set	1.63	0153-02C



6-in-1 Multi-tool

Contains: 3/16" & 1/4" Flat-Tip, #1 and #2 Phillips and 5/16" & 1/4" Hex

- High-quality bits for longer life
- High-grade, rust resistant, chrome-plated finish
- Soft, cushioned grip for extra comfort and torque
- Lifetime limited warranty

• **Note:** This is not an insulated tool

Description	lb	No.
6-in-1 Multi-tool	0.42	0153-42C



7-Piece Combination Ratcheting Wrench Set

Set contains: sizes 1/4", 5/16", 3/8", 7/16", 1/2", 9/16" & 5/8"

- "Five-degree" ratcheting design for versatility and ease of use in tight spaces
- Polished chrome finish for superior corrosion resistance
- Precision heads for accurate fastener fit
- Hardened for durability and longer life
- Meets or exceeds ANSI standards
- Lifetime guarantee

• **Note:** This is not an insulated tool

Description	lb	No.
7-Piece Combination Ratcheting Wrench Set	1.25	0354-01

Utility Knife

- Over-molded for secure, comfortable grip
- Retractable three-position blade for safety and convenience
- Easy front-loading design provides for quick blade change
- Blade storage in pop-up holder
- Packaged with three heavy-duty patented serrated blades

• **Note:** This is not an insulated tool



Description	lb	No.
Utility Knife	0.44	0652-11

Hand Tools

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at **1-800-545-7698**

Tape Measure

- Compact housing fits easily in the hand and pouch
- Easy to use Click Lock holds tape securely without moving the blade
- Tough ABS case is over-molded with TPR for added protection
- Stainless steel side panels
- Double sided tape with double foot can be read from above or below
- Rigid 1" wide blade on all models
- Abrasion resistant nylon coated hardened steel blade
- Four rivets on foot resist pull-off, adjust for inside and outside readings
- 16" and 19.2" stud markings

• **Note:** This is not an insulated tool



0155-25A



0155-16A

Description	lb	No.
Tape Measure, 25'	0.89	0155-25A
Tape Measure, 16'	0.64	0155-16A

16 oz. Straight Claw Hammer

- Universal design perfect for a variety of applications
- Lightweight, durable fiberglass handle for shock resistance
- Cushioned grip and flared handle end for user comfort and to reduce slipping
- Exceeds ASME/ANSI specifications
- Lifetime limited warranty

• **Note:** This is not an insulated tool



0156-12

Description	lb	No.
16 oz. Straight Claw Hammer	1.57	0156-12

Pocket-light Flashlight

- High intensity Xenon fired lamp
- Luminous tip so flashlight can be located in the dark
- Lifetime limited warranty
- Submersible to 500 feet
- Dust and rust proof
- Batteries included



46500

Description	lb	No.
Pocket-light Flashlight	0.44	46500

Flexible LED Flashlight

- Small 9/32" head will illuminate tight spaces other flashlights cannot
- 16" flexible PVC coated cable will bend and hold the desired state
- Runs up to 100 hours on two AA batteries (batteries are included)
- Rugged white LED light source lasts over 50,000 hours
- Anodized aluminum housing with push-button ON/OFF switch on tail-cap



10220

Description	lb	No.
Flexible LED Flashlight	0.33	10220

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at **1-800-545-7698**

Hand Tools

High Dexterity Gloves

- Tough, soft and comfortable to wear—resists shrinking, stretching and hardening
- Wing closing wrist strap for perfect adjustments, keeping debris out and easy-on/easy-off
- Stretch fabric for flexibility and fit with padded knuckles
- Textured palm pads for better grip, extra wear and added durability
- Thumb design for better flexibility and Lycra side panels for improved dexterity
- Terry cloth thumb to remove sweat or debris from face



0358-11L

Description	lb	No.
High Dexterity Gloves, size L	0.20	0358-11L



301A

Keyhole Saw

- Ergonomic style handle with non-slip grip creates a sure and comfortable feel
- Hardened steel blade makes cutting drywall, cement board, plastic and wood quick and easy
- Blade goes through the handle for maximum support of the cutting blade

Description	No.
Keyhole Saw with 6" blade (152mm)	301A



322-013

PVC Saws

- "V" tooth design enables straight cuts on both push and pull saw strokes
- Resharpenable blade
- Pointed blade nose makes drywall surface penetration easy
- Ergonomic handle is interchangeable with most popular PVC saw brands

Description	No.
PVC Saw, 13" (330mm)	322-013
PVC Saw, 18" (457mm)	322-018
Blade for 00113	322-113
Blade for 00114	322-118



333A

12" Heavy Duty Hacksaw

- Over-molded rugged design for heavy-duty use and comfort
- Fully-adjustable blade tension up to 30,000 psi for longer blade life and faster, accurate cuts
- Alternative 45 degree blade mounting allows for flush cutting
- Mounting for most reciprocating saw blades for extra versatility
- Handy blade storage in tubular frame
- Convenient front grip feature for two-handed sawing
- Complete with bi-metal blade (12" /24 TPI)
- Lifetime limited warranty

Description	lb	No.
12" Heavy Duty Hack Saw	2.15	333A

Hand Tools / Hole Making

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at **1-800-545-7698**

Levels

- Professional grade levels
- Three rare-earth magnets provide superior holding strength
- Four vial design - 0°, 90°, 45°, and 30°
- Machined from aluminum alloy and anodized to aircraft standards
- Compact size fits easily in tool pouch



Specifications: (L107)

Overall Length: 8-1/2" (21.6 cm)

Width: 3/4" (1.9 cm)

Height: 1-1/4" (3.2 cm)

Specifications: (L77)

Overall Length: 5-1/2" (140 mm)

Width: 3/4" (19 mm)

Height: 1-1/2" (38 mm)

Description	lb	No.
Mini Magnetic Bubble Level	0.22	L77
Torpedo Level	0.34	L107

Crimping/Stripping Combination Tool

- Narrow nose for getting into tight boxes
- Wire looping holes in jaw
- Screw cutting stations are collapsed around the pivot - 20% less force is required
- Machined stripping stations with a positive stop provide precise stripping diameters
- Long curved cutter blades reduce force required by 25% and can cut NM in single cut
- Smooth, rounded pivot bolt won't catch in tool pouch or on other tools
- Easy-to-read graphics
- Comfortable, cushioned grips

1923 Specifications

Strips: 8-18 AWG solid, 10-22 AWG stranded

Crimps: 10-22 AWG insulated and non-insulated terminals

Cuts: #4-40, #6-32, #8-32, #10-24 and #10-32 screws

Length: 8-1/2" (216 mm)

1927 Specifications

Strips: 10-22 AWG solid and stranded

Crimps: 10-22 AWG insulated and non-insulated terminals

Cuts: #4-40, #5-40, #6-32, #8-32, #10-24 and #10-32 screws

Length: 8-1/8" (206 mm)



Description	No.
Crimping/Stripping Combination Tool	1923
Crimping/Stripping Combination Tool	1927

Aviation Snips

- Precision ground chrome moly steel blades provide smooth cutting action
- Auto release latch for one handed operation
- Cuts up to 18-gauge (1.2mm) cold-rolled steel or 24-gauge (0.7mm) 304 stainless steel
- Meets ANSI/ASTM B107.16-1998 specification



Description	No.
Left Cut Aviation Snips	0653-01L
Right Cut Aviation Snips	0653-01R
Straight Cut Aviation Snips	0653-01S

Slug-Splitter SC™ (Self-Centering) Knockout Punches

- Slug-Splitter SC™ heavy-duty punches are designed to punch up through 10 gauge (3.5mm) stainless steel
- Self-centering punch aligns itself on pilot hole (Slug-Splitter SC™)
- Designed for stainless steel applications
- Unique slug-splitting design and tool steel construction easily punch to gauge (3.5mm) mild steel and stainless steel
- Unique punch profile also splits slugs for easier slug removal

Description	dia.	No.
Slug-Splitter SC™ Knockout punch	1/2"	28154
Slug-Splitter SC™ Knockout punch	3/4"	28156
Slug-Splitter SC™ Knockout punch	1"	28158
Slug-Splitter SC™ Knockout punch	1-1/4"	28160



For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at **1-800-545-7698**

Hole Making



72385B

Slug-Buster® Knockout Kit with Ratchet Wrench

- 1" Hex Ratchet Wrench allows use with both 3/8" (9.5mm) and 3/4" (19.1mm) draw studs
- High-impact, rugged plastic carrying case

Description	lb	No.
Slug-Buster® Knockout Kit with Ratchet Wrench	10	72385B



73105B

Ram and Hand Pump Hydraulic Driver Kit

- Fast, easy and simple to operate
- Compact design for field use on construction sites and maintenance jobs
- Punches 10 times faster than wrench method
- Will also drive 751 Cable Cutter head
- Can be used with all standard round, Slug-Buster® and Slug-Splitter SE™ punch sizes
- Can be used with non-round punches (adapter may be required)
- 3-foot hose
- Powerful 11-ton hydraulic ram

Description	lb	No.
Ram and Hand Pump Hydraulic Driver Kit Driver, Hand Pump, Slug-Buster® Punches, Dies and Draw Studs for 1/2" through 2" and 2-1/2" through 4" Standard Conduit Size Punches, Dies and Draw Studs, Adapter, Spacers, Kwik Stepper® Step Bit and Steel Case	24.5	73105B



2-5/8" Diameter Plumber Stud Punch

Punches 2-5/8" (66.7mm) diameter hole in metal studs for professional-looking installation of 2" water, vent, waste pipes

- Two-speed lever action for fast, easy punching of 24 to 20 gauge thick metal studs
- 2-1/8" (54mm) throat width fits over most studs and channels
- High strength alloy aluminum c-frame and handle provides lightweight tool for easy handling
- Lever action punch retraction strips punch out of metal stud fast and easy

Description	lb	No.
Plumber Stud Punch	10.60	713



709

Metal Stud Punches

- Punch up through 20 gauge (0.9mm) steel studs in one stroke
- Aluminum head provides strength with minimum weight, reducing operator fatigue
- Contoured handle design gives better operator leverage and makes it possible to punch in tight spaces
- Self-stripping design eliminates punch hang-ups
- Automatically centers holes on standard studs
- Conversion kit available to upgrade early models from 24 gauge to 20 gauge maximum capacity

Description	lb	No.
Metal Stud Punch, 7/8" (22.2mm) diameter	7.0	709
Metal Stud Punch, 1-11/32" (34.1mm) diameter	7.5	710

Hole Making

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at 1-800-545-7698

6-32 to 1/4-20 6-Piece Drill Tap Kit

- Complete hole drilling, tapping and deburring/countersinking in one operation with power drill saves labor and time
- Back tapered beyond tap to prevent thread damage from over-drilling
- Deburr/countersink also provided on bit beyond back taper
- Made from hardened high-speed steel vs. carbon steel for longer life
- High quality hex shank to ensure strong connection to drill chuck
- Designed to tap up to 10-gauge metal
- Quick change adaptor included in both metric and standard kits



DTAPKIT

Description	No.
6-Piece Drill Tap Kit	DTAPKIT

Kwik Stepper® Step Bit Kit

Kit includes: 1/2" (34401), 7/8" (34403), and 1-1/8" (30008) multi-hole step bits, plastic case (35936)

Hole Sizes: From 1/8" through 1-3/8" (3.2 - 34.9 mm)

Capacity: Cut up through 3/8" (9.5 mm) mild steel, copper, brass, aluminum, wood, plastic and laminates

- Unique split tip design penetrates through steel faster
- Resists walking or skidding, even on round surfaces
- Balanced, double-flute construction requires less pressure, does the work for you
- Designed and manufactured in USA



35884

Description	No.
Kwik Stepper® Step Bit Kit	35884
1-1/8" Electrician's Step Bit	30008
1/2" Multi-Hole Step Bit	34401
7/8" Multi-Hole Step Bit	34403
Plastic Case	35936

Nail Eater II® Wood Boring Bits

- Improved cutting edge provides 30% longer life span
- Patented new design for improved cutting and cleaner holes
- Self-feeding screw point draws bit through wood
- Unique patented design cutting angle - smoother starts, reduced cutting loads
- Made of super tough, heat-treated steel; cuts through nails and provides longer life
- "Shorty" bits - for working in tight places, yet still can go through three abutting 2 x 4s
- For more length, use Bit Extensions (see chart)



Description	lb	No.
5/8" Shorty Wood Boring Bit	0.30	61PTS-5/8
3/4" Shorty Wood Boring Bit	0.40	61PTS-3/4
7/8" Shorty Wood Boring Bit	0.50	61PTS-7/8
1" Shorty Wood Boring Bit	0.80	61PTS-1
3/4" Big Shank Shorty Wood Boring Bit	0.50	62PTS-3/4
7/8" Big Shank Shorty Wood Boring Bit	0.60	62PTS-7/8
1" Big Shank Shorty Wood Boring Bit	0.70	62PTS-1
1-1/8" Big Shank Shorty Wood Boring Bit	0.90	61/62PTS-1-1/8
1-1/4" Big Shank Shorty Wood Boring Bit	1.10	61/62PTS-1-1/4
3/4" Wood Boring Bit	1.20	66PT-3/4
7/8" Wood Boring Bit	1.50	66PT-7/8
1" Wood Boring Bit	1.80	66PT-1
1-1/8" Wood Boring Bit	2.30	66PT-1-1/8
1-1/4" Wood Boring Bit	1.20	66PT-1-1/4
Bit Extension, 12"	1.40	901-12
Bit Extension, 18"	4.30	904H-18

For more information on the full Greenlee line,
visit www.Greenlee.com or call
Customer Service at **1-800-545-7698**

Hole Making

E-Z Bore® Conduit and Pipe Bit Set

- Complete assortment of the most commonly used E-Z Bore® bits
- High-impact, rugged plastic carrying case
- Full complement of accessories conveniently stored



Description	lb	No.
EZ Bore® Conduit and Pipe Bit Set	6.0	149H
1" E-Z Bore Bit	0.40	149H-1
1-1/8" E-Z Bore Bit	0.30	149H-1-1/8
1-1/4" E-Z Bore Bit	0.30	149H-1-1/4
1-3/8" E-Z Bore Bit	0.40	149H-1-3/8
1-1/2" E-Z Bore Bit	0.40	149H-1-1/2
1-3/4" E-Z Bore Bit	0.50	149H-1-3/4
2" E-Z Bore Bit	0.60	149H-2
2-1/8" E-Z Bore Bit	0.70	149H-2-1/8
2-1/4" E-Z Bore Bit	0.70	149H-2-1/4
2-9/16" E-Z Bore Bit	0.80	149H-2-9/16
3" E-Z Bore Bit	1.10	149H-3
3-5/8" E-Z Bore Bit	2.10	149H-3-5/8
4-5/8" E-Z Bore Bit	2.60	149H-4-5/8

Spade Bit Kit

Spade Bit Kit Includes: 33A-3/8 , 33A-1/2 , 33A-5/8 , 33A-3/4 , 33A-7/8 , 33A-1

- Bore hardwood, softwood, plywood and drywall
- Forged and heat treated for long life
- Hole in top center of bit for wire pulling
- P.O.P. packaged



Description	No.
Spade Bit Kit	33AR-6

D'VersiBIT® Starter Kit

- All the tools to complete a typical wiring job. Includes step bit (**09-03-54B**), placement tool (**712P**) and pulling grip (**150Q**)
- 1" (25.4mm) Hex ratchet wrench allows use with both 3/8" (9.5mm) and 3/4" (19.1mm) draw studs
- 12.7mm Kwik Stepper® step bit included
- Plastic carrying case included



Description	No.
DVersiBIT Starter Kit	DBITKIT
Step bit	09-03-54B
Placement tool	712P
Pulling grip	150Q

D'VersiBIT® System Type A Auger

- Wood-type auger bit with screw point
- Pulls itself through wood, avoids walking or skidding
- Excellent for drilling in soft woods or through thin sections
- Slow back-taper allows for easy retrieval



Description	No.
3/4" Type A Auger Bit	12-04-54A
1" Type A Auger Bit	16-04-54A
D'VersiBIT® 1/4" x 54" Bit Extension	4XT-54

Hole Making

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at **1-800-545-7698**

Quick Change Hole Saw Kit

Kit contains Bi-metal hole saws for 1/2" through 2" conduit sizes

- New arbor allows for rapid mounting or removal of hole saws
- Faster, easier slug removal
- Drill pilot hole without saw:
 1. Eliminates the "bite" when saw crashes into the steel
 2. Provides better ergonomics - reduces stress on wrist, arm and hand
 3. Eliminates obstructed view from hole saw
- Only one arbor required from 7/8" to 6" (7/16" shank recommended for hole saws above 2-1/2")
- Works with recessed light and carbide grit hole saw products as well
- Adapters re-usable to minimize costs
- Universal - works with any brand hole saw



830QS

Description	No.
Quick Change Hole Saw Kit for 1/2" through 2" Conduit sizes	830QS
5/16" Arbor, Minimum chuck Size 3/8"	02800
7/16" Arbor, Minimum chuck Size 1/2"	02801
Retrofit Kit-upgrade 3 hole saws up to 1-9/16" to Quick Change	02802
Small Adapters for 9/16" to 1-9/16" Saws Qty. 10	02803
Large Adapters for 1-5/8" to 6" Saws Qty. 3	02804
Bushings for 1-1/4" to 1-9/16" Saws Qty. 5	02805
Hole saw stops	8265

Stainless Steel Carbide Tipped Cutter Kit

- Cuts stainless steel quickly and easily
- Quick Change arbor allows you to change cutter heads with a simple push and a turn. Use the same arbor for different size cutting heads
- Removable cutter heads available in sizes from 5/8" through 3"
- Flange stop prevents over-drilling
- Ejector spring on all sizes above 3/4"
- Replaceable, cobalt-steel pilot drill with split-point tip to prevent walking
- Precision carbide teeth for optimum performance and durability
- Minimum chuck size of 3/8"



660

Description	Hole size	No.
Stainless Steel Carbide Tipped Cutter Kit 7/8", 1-1/8", 1-3/8", 1-3/4", 2" cutter heads; arbor, hex key and case		660
Carbide-tipped hole cutter	5/8"	645-5/8
Carbide-tipped hole cutter	11/16"	645-11/16
Carbide-tipped hole cutter	3/4"	645-3/4
Carbide-tipped hole cutter	13/16"	645-13/16
Carbide-tipped hole cutter	7/8"	645-7/8
Carbide-tipped hole cutter	1"	645-1
Carbide-tipped hole cutter	1-1/16"	645-1-1/16
Carbide-tipped hole cutter	1-1/8"	645-1-1/8
Carbide-tipped hole cutter	1-7/32"	645-1-7/32
Carbide-tipped hole cutter	1-1/4"	645-1-1/4
Carbide-tipped hole cutter	1-5/16"	645-1-5/16
Carbide-tipped hole cutter	1-3/8"	645-1-3/8
Carbide-tipped hole cutter	1-7/16"	645-1-7/16
Carbide-tipped hole cutter	1-1/2"	645-1-1/2
Carbide-tipped hole cutter	1-3/4"	645-1-3/4
Carbide-tipped hole cutter	2"	645-2
Carbide-tipped hole cutter	2-1/8"	645-2-1/8
Carbide-tipped hole cutter	2-1/4"	645-2-1/4
Carbide-tipped hole cutter	2-3/8"	645-2-3/8
Carbide-tipped hole cutter	2-1/2"	645-2-1/2
Carbide-tipped hole cutter	2-5/8"	645-2-5/8
Carbide-tipped hole cutter	3"	645-3

Ultra Cutter Kit

Ultra Cutter Kit: Includes 7/8" to 2-1/2" cutters, two small arbors for extended assembly to 7/8" and 1-1/2" cutters, large arbor, hex wrench, case. For conduit sizes 1/2" through 2".

- Lasts 10 times longer than standard hole saws
- Precision-ground teeth cut smooth, burr-free holes with ease
- 1/4" (6.35 mm) capacity
- Durability and speed provide low cost per hole
- Split-point pilot drill prevents "walking" - makes accurate hole placement easy
- Spring-loaded slug ejector saves time
- No tool required to change cutter sizes
- Less chance of broken teeth because the saw body is machined out of solid, high-speed steel



930

Description	No.
Ultra Cutter Kit	930

Carbide-Grit Hole Saws

Long-lasting tungsten carbide-grit delivers extremely clean, smooth cuts through tile, cement board, and other abrasive materials

- Perfect for cutting holes in Quazite® enclosure or hardy board siding for 3-0 box installation
- Rugged construction for enduring performance



725-001

Description	No.
1/4" Carbide-Grit Tipped Pilot Drill	725-001
7/8" Hole Saw	725-7/8
1-1/8" Hole Saw	725-1-1/8
1-3/8" Hole Saw	725-1-3/8
1-1/2" Hole Saw	725-1-1/2
1-3/4" Hole Saw	725-1-3/4
2" Hole Saw	725-2
2-1/8" Hole Saw	725-2-1/8
2-1/2" Hole Saw	725-2-1/2
3-5/8" Hole Saw	725-3-5/8
4-1/8" Hole Saw	725-4-1/8
4-1/2" Hole Saw	725-4-1/2

Bi-Metal Hole Saw Kit

Kit Includes: 7/8" hole saw (**825-7/8**), 1-1/8" hole saw (**825-1-1/8**), 1-3/8" hole saw (**825-1-3/8**), 1-3/4" hole saw (**825-1-3/4**), 2" hole saw (**825-2**), 2-1/2" hole saw (**825-2-1/2**), Arbor w/Pilot Drill (2) (**38522**), Arbor w/Pilot Drill (**37157**), Arbor w/Pilot Drill (**37155**), Arbor w/Pilot Drill (**37156**)

- This plumber's hole saw kit provides an assortment of the most commonly used Greenlee variable pitch hole saw sizes and arbors
- High-impact, rugged plastic carrying case



830

Description	No.
Hole Saw Kit for 1/2" through 2" conduit sizes	830
7/8" Hole Saw	825-7/8
1-1/8" Hole Saw	825-1-1/8
1-3/8" Hole Saw	825-1-3/8
1-3/4" Hole Saw	825-1-3/4
2" Hole Saw	825-2
2-1/2" Hole Saw	825-2-1/2
Arbor w/Pilot Drill	38522
Arbor w/Pilot Drill	37157
Arbor w/Pilot Drill	37155
Arbor w/Pilot Drill	37156

Hole Making

For more information on the full Greenlee line,
visit www.Greenlee.com or call
Customer Service at **1-800-545-7698**

Bi-Metal Hole Saw Kit

Kit Includes: 3/4" hole saw (825-3/4), 7/8" hole saw (825-7/8), 1-1/8" hole saw (825-1-1/8), 1-1/2" hole saw (825-1-1/2), 1-3/4" hole saw (825-1-3/4), 2-1/4" hole saw (825-2-1/4), Arbor w/Pilot Drill (37155), Arbor w/Pilot Drill (37156), Arbor w/Pilot Drill (38526)

- This plumber's hole saw kit provides an assortment of the most commonly used Greenlee variable pitch hole saw sizes and arbors
- High-impact, rugged plastic carrying case



889

Description	No.
Plumber's Hole Saw Kit-3/4" through 2-1/4" conduit sizes	889
5/16" Arbor, min. chuck size 3/8"	02800
7/16" Arbor, min. chuck size 1/2"	02801
Retrofit kit, upgrade 3 hole saws up to 1-9/16" to quick change	02802
Small adaptors for 9/16" to 1-9/16" Saws, qty. 10	02803
Large adaptors for 1-5/8" to 6" Saws, qty. 3	02804
Bushings for 1-1/4" to 1-9/16" Saws, qty. 5	02805
Hole saw stops	8265

Reciprocating Blades

- Progressive-pitch reciprocating saw blades cut a wide range of standard construction materials quickly and cleanly - regardless of thickness
- Bimetal construction provides maximum flexibility and break resistance - plus lasting sharpness
- Exclusive plunge tip makes starting cuts faster and easier
- Blades color coded by application



09963




09991

Description	Length (in.)	Teeth per inch	Type	Application	No.
Metal, 5 pk.	6 x 3/4 x .035	progressive	Bimetal, straight	metal	353-123
Metal, 5 pk.	4 x 5/16 x .035	18	Bimetal, scroll	metal	353-318
Metal, 5 pk.	4 x 3/4 x .035	18	Bimetal, straight	metal	353-418
Metal, 5 pk.	6 x 3/4 x .035	14	Bimetal, straight	metal	353-614
Metal, 5 pk.	6 x 3/4 x .035	18	Bimetal, straight	metal	353-618
Metal, 5 pk.	6 x 3/4 x .035	24	Bimetal, straight	metal	353-624
Metal, 2 pk.	8 x 3/4 x .050	10/14	Bimetal, straight	metal	353-804
Metal, 2 pk.	8 x 3/4 x .050	14	Bimetal, straight	metal	353-814
Metal, 2 pk.	8 x 3/4 x .050	18	Bimetal, straight	metal	353-818
Wood, 5 pk.	8 x 3/4 x .050	progressive	HCS, Taper	wood only	353-234
Wood, 5 pk.	6 x 3/4 x .050	6	Bimetal, Taper	wood with nails	353-656
Wood, 5 pk.	6 x 3/4 x .050	6	Bimetal, straight	wood with nails	353-646
Wood, 5 pk.	9 x 3/4 x .050	6	Bimetal, straight	wood with nails	353-956
Wood, 5 pk.	12 x 3/4 x .050	6	Bimetal, straight	wood with nails	353-156
Demolition, 2 pk.	9 x 7/8 x .062	6	Bimetal, taper	wood demolition	353-966
Demolition, 2 pk.	9 x 7/8 x .062	8/10	Bimetal, taper	metal demolition	353-969
Specialty, 5 pk.	8 x 3/4 x .050	progressive	Bimetal, taper	general	353-345

Flex Splitter® and Flexible Conduit Cutter

- Cut flexible metal conduit in seconds with a few turns of the crank and an easy twist of the conduit
- Ample clearance between handle and body for comfortable operation
- Set conduit size for multiple cuts of the same size conduit. No need to reset
- Compact and lightweight. Fits easily in back pocket or tool pouch
- Set blade adjustment with only a screwdriver
- Convenient in-handle blade storage - holds up to five spare blades
- Point-of-purchase packaged. Blades point-of-purchase packaged 1 and 5 blades per package

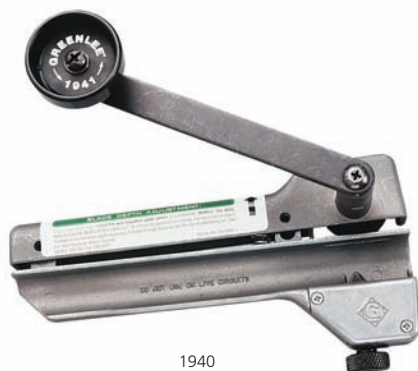

1940

Description	No.
Flex Splitter® Flexible Metal Conduit Cutter	1940
Single Blade for 1940	1941-1
5 pack blades for 1940	1941-5

PVC Heating Blankets for up to 4"

- Make bends, offsets or saddles in PVC fast and easy
- Easy to use: wrap blanket around PVC, secure with hook and loop strap
- Built-in stiffeners help keep the blanket tight to the PVC surface
- Remove blanket and form bend by hand
- Controlled, even heating for uniform bending
- Heavy-duty cord and thermostat for long life
- Temperature over 300° F (149° C)



860

Description	lb	No.
PVC Heating Blanket for up to 1-1/2"	1.70	860-1-1/2
PVC Heating Blanket for 2"-3"	3.30	860-3
PVC Heating Blanket for 3-1/2" and 4"	4.80	860-4

Electric PVC Heater/Bender for 1/2" - 2"

Specifications

Capacity: 1/2" - 2" PVC All Schedules

Power Source: 120 VAC 20 AMP or 3000 Watt Generator

- Easy to use: preheat for 10 minutes, insert PVC, rotate until pliable, remove and form bend
- Sturdy double wall metal with fiberglass insulation and reflective interior for fast, even heat
- Full length door for easy PVC loading and removal
- Other features include on/off switch, pilot light and carrying handle
- Heats 24" long section of pipe



849

Description	lb	No.
Electric PVC Heating Blanket for 1/2" to 2"	15.0	849

PVC Plugs and Plug Set

Specifications

Capacity: 2" - 6" PVC Schedules 40 and 80

- Use with PVC Heating Blankets or Electric Heaters to plug the ends of the PVC being heated
- The trapped air will help keep the PVC from collapsing while forming the bend
- Use on Schedule 40 and 80 PVC
- Available in 2" - 4" set or individual sizes 2" - 6"
- Order two, one for each end of the PVC



859-4

Description	lb	No.
PVC Plugs and Plug Set	8.0	859-4

Fishing

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at **1-800-545-7698**

Steel Fish Tape

- 1/8" x .060" Oil-tempered spring steel for excellent fishing performance
- Dirt-free tape finish keeps hands cleaner during use
- High-impact, one-piece handle for maximum durability, long life, and easy, comfortable use
- 360° uniform grip, "no bump" case design reduces fatigue
- Large handle grip for greater user control
- Self-tensioning case for easy tape winding
- Wide, impact-resistant rewinder case with viewports to ensure tape fit and retaining strap on inside to hold tape secure

Description	lb	No.
125' x 1/8" Steel Fish Tape in 12" Winder Case	5.5	FTS438-125
240' x 1/8" Steel Fish Tape in 12" Winder Case	8.5	FTS438-240



Steel Fish Tape

- 50' x 1/8" x .045" Steel Fish tape with winder case
- Oil-tempered spring steel for excellent fishing performance
- Durable thumb winder slide to speed payout and rewind of fish tape as well as reduce fatigue

Description	lb	No.
Steel Fish Tape	1.2	438-5H



Flat-Steel Fish Tape

- Flat steel tape reaches easily above ceilings, under carpets, and through walls to install wire
- 25' (7.6 m) long, extending your reach where a traditional fish tape can't
- Winder case with crank handle for easy compact storage
- **Dimensions:** Steel tape 25' (7.6 m) long x 1/4" (6.4 mm) wide X .030 (.8 mm) thick

Description	No.
Flat-Steel Fish Tape	438-2X



36" Telescoping Wire Reacher

- Extends your reach above ceilings and walls
- Stainless-steel construction for long life
- Hook can be used to install cables and wires up to 3/4in. (19 mm) diameter
- Clip included for easy storage in shirt pocket
- Self-contained, no loose parts

Description	lb	No.
36" Telescoping Wire Reacher	1.6	FP3



For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at 1-800-545-7698

Testing & Measurement

Non-Contact Voltage Detector

Accessories included: (2) 1.5V AAA batteries

- Designed and assembled in USA
- Automatic self-test verifies the integrity of the unit
- Bright LEDs and audible alarm sound if voltage is present
- Silent-mode feature for use in quiet settings
- Safe, non-contact voltage detection
- Use to detect voltage in outlets, lighting fixtures, circuit breakers, wires, and cables or to find a break in a wire
- Automatically turns off after five minutes of non-use to conserve battery life
- Low battery indicator
- Lifetime Limited Warranty

Specifications

Voltage Detection: 50V–1000VAC

Frequency: 50-500 Hz

Measurement Category: CAT IV, 1000V



GT-12

Description	No.
Non-Contact Voltage Detector	GT-12

Adjustable Non-Contact Voltage Detector

Accessories included: (1) 1.5V AAA Battery

- Adjustable to safely detect power and low voltage
- Safely detects AC voltage without touching the bare conductor
- Adjustable for use on power wiring plus lighting, thermostats and other low voltage circuits
- Use to detect voltage in outlets, lighting fixtures, wires and cables
- Finds breaks in wires
- Identifies hot and neutral conductors
- Low battery Indication
- Lifetime Limited Warranty

Specifications

Voltage Detection: AC V 5-1000

Frequency: 50-500Hz

Measurement Category: CAT IV, 1000V



GT-16

Description	No.
Adjustable Non-Contact Voltage Detector	GT-16

DM-210A Digital Multimeter

The DM-210A provides all of the critical day-to-day features of hand-held multimeters in a smaller, ergonomic design. Look to this detector to take advantage of AutoCHECK, EF-Detection, audible and visible alerts and a back-lit LCD display.

- Display backlight
- Analog bar graph
- Computer Interface capability
- Auto Power Off
- Auto and manual ranging
- Data Hold

Specifications

Voltage: 60mV to 1,000V AC/DC

Display counts: 6000

Amperage: 600mA to 10A AC/DC

Measurement Category: CAT IV 300V, CAT III 600V, CAT II 1000V



DM-210A

Description	No.
Digital Multimeter	DM-210A

DM-510A Digital Multimeter

The DM-510A provides critical functions in a streamlined design for CAT IV 300V, CAT III 600V and more, in a smaller, ergonomic design. Look to this detector to take advantage of AutoCHECK, EF-Detection, audible and visible alerts and a back-lit LCD display.

- Display backlight
- Analog bar graph
- Computer Interface capability
- Auto Power Off
- Auto and manual ranging
- Data Hold

Specifications

Voltage: 60mV to 1,000V AC/DC

Display counts: 6000

Amperage: 600mA to 10A AC/DC

Measurement Category: CAT IV 300V, CAT III 600V, CAT II 1000V



DM-510A

Description	No.
Digital Multimeter	DM-510A

Testing & Measurement

For more information on the full Greenlee line,
visit www.Greenlee.com or call
Customer Service at **1-800-545-7698**

Automatic Electrical Tester

Accessories included: (1) 9 V battery, test leads, carrying case

- Hassle-free, automatic measurement of amperage, voltage, and resistance
- Compact design for measuring in tight spaces
- 400A AC, 600V AC/DC measurement
- Data hold to capture important readings
- Auto off for longer battery life



CMT-80

Specifications

Amperage Measurement: 0.6 - 400.0A AC

Voltage Measurement: AC V: 1.3-600.0V; DC V: 1.8-600.0; -0.6 to -600.0V

Resistance: 2000Ω with continuity beeper

Display: 6000-count LCD

Jaw Opening: 1.06 " (27 mm)

Measurement Category: Cat III, 600V

Description	No.
Automatic Electrical Tester	CMT-80

Manual Ranging Multimeter

Accessories included: (1) 9V battery, Type K bead temperature probe (482°F/250°C max), protective boot

- Measures AC/DC voltage, DC current, and resistance
- Measures temperature over a wide range
- Performs continuity and diode tests



DM-40

Specifications

Voltage Measurement: ACV - 200.0, 300V;

DCV - 200.0, 2000mV; 20.00, 200.0, 300V

Amperage Measurement: DCA - DCA 200.0, 2000μA; 20.00, 200.0mA

Resistance: 200.0, 2000Ω; 20.00, 200.0, 2000kΩ

Temperature Range: -40°F to 1832°F (-40°C to 1000°C)

Measurement Category: Cat II, 300V

Description	No.
Multimeter, DMM, 600V AC/DC w/temp	DM-40

Infrared Thermometer

Accessories included: (1) 9V battery and carrying case

- Safe, non-contact temperature measurement
- Laser indicates approximate center of the target area
- Displays temperatures in either Fahrenheit or Celsius
- Auto power off for longer battery life
- Easy to read backlit display for use in low light conditions



TG-600

Specifications

Optical resolution: 12:1 at focus point

Target Temperature Range: -4°F to 932°F (-20°C to 500°C)

Accuracy: ± 2% or 4°F (± 2°C)

Repeatability: Within ± 1% of reading or ± 2°F (1°C)

Response Time: 500ms, 95% response

Emissivity: Preset at 0.98

Description	No.
Infrared Thermometer	TG-600

True RMS Clamp Meter

Accessories included: 3V Standard button battery (IEC-CR 2032; ANSI-NEDA 54004LC)

- AC amperage, AC/DC voltage measurement
- True RMS for the most accurate measurement where harmonics are present
- Quick, easy operation
- Auto power off for longer battery life
- Resistance measurement
- Audible continuity and diode tests
- Frequency measurement
- Data hold to capture measurement
- 4000 count LCD
- Lifetime Limited Warranty



CM-450

Specifications

Amperage Measurement: 40.00, 400.0, 600 A AC

Voltage Measurement: 4.000, 40.00, 400.0, 600 V AC
400.0 mV, 4.000, 40.00, 400.0, 600V DC

Resistance: 400.0Ω; 4.000, 40.00, 400.0kΩ; 4.000, 40.00MΩ

Display: LCD, 4000-count

Jaw Opening: 1.02" (26 mm)

Measurement Category: CAT III, 600V per UL 61010-1

Description	No.
True RMS Clamp Meter	CM-450

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at 1-800-545-7698

Testing & Measurement

Specifications

Electrical: Twelve AA batteries

Battery Life: 20 hours typical

Environment: Operating Temperature: -4° to 122°F (-20°C to 50°C);
Storage Temperature: -40° to 158°F (-40°C to 70°C)

Physical: Length: 30.7" (780mm);
Width: 7.8" (198mm);
Height: 12.8" (325mm)



Marker-Mate® Electronic Marker Locator

- Designed to locate buried electronic markers, including Omni Marker®, and Uni Marker™
- Five+ foot depth range
- Detects up to seven different marker types
- User-adjustable detection threshold
- Bar graph, numeric & audible signal strength indicators
- Headphone jack
- Adjustable time out feature prolongs battery life
- Weather resistant

Description	lb	No.
Marker-Mate® Electronic Marker Locator	4.50	EML100

Omni Marker®

- Electronically marks and relocates buried facilities
- Unique design produces a uniform, spherical RF field in every direction
- Easily located up to 5' away with any modern marker locator
- Wider field with a signal peak directly above the marker provides precise location
- Requires no particular orientation when buried
- Greater range than standard 4" ball markers
- High-reliability design lasts as long as your buried plant
- Color coded by utility application
- Lifetime limited warranty



Description/Application	Color	Frequency	No.
Omni Marker® / Power	Red	169.8kHz	0160-0001-1
Omni Marker® / Water	Blue	145.7kHz	0161-0001-1
Omni Marker® / Sanitary	Green	121.6kHz	0162-0001-1
Omni Marker® / Telephone	Orange	101.4kHz	0163-0001-1
Omni Marker® / Gas	Yellow	83.0kHz	0164-0001-1
Omni Marker® / Cable TV	Orange/Black	77.0kHz	0165-0001-1
Omni Marker® / Non-Potable Water	Purple	66.35kHz	0168-0001-1

Uni Marker®

- Electronically marks buried facilities for later relocation
- Rugged polyethylene case ensures years of useful life
- Small size and flat design attach easily to non-metallic utility box lids, hand holes and other buried enclosures
- Location is simple with any modern marker locator
- Range is 25% more than other similar-style markers
- Signal peak ensures location within inches of the marker
- Color coded by utility application
- Lifetime limited warranty



Description/Application	Color	Frequency	No.
Uni Marker® / Power	Red	169.8kHz	0170-0001-1
Uni Marker® / Water	Blue	145.7kHz	0171-0001-1
Uni Marker® / Sanitary	Green	121.6kHz	0172-0001-1
Uni Marker® / Telephone	Orange	101.4kHz	0173-0001-1
Uni Marker® / Gas	Yellow	83.0kHz	0174-0001-1
Uni Marker® / Cable TV	Orange/Black	77.0kHz	0175-0001-1
Uni Marker® / Non-Potable Water	Purple	66.35kHz	0178-0001-1

Wire and Valve Locator

- Adjustable transmit power allows you to select the best signal for maximum performance
- Transmitter's high power output offers extended range and use on higher resistance wire paths that other locators can't touch
- Receiver provides both audible and visual indications of signal strength
- Lightweight receiver wand makes it easy for you to move along quickly to locate even the longest wire path
- Rugged headphones block ambient noise and improve "feel" for the signal
- Includes transmitter, receiver, headset, ground stake, and complete instructions



Specifications

Power Requirements: Transmitter - (8) "D" Cell;
Receiver - (1) 9V battery

Battery Life: Transmitter - 50 hours nominal;
Receiver - 100 hours nominal

Transmitter Frequency: 1748Hz

Transmitter Power: 750Vp-p 285Vrms

Voltage Protection: 120VAC/250VDC

Construction: Powder-coated aluminum housing in polyethylene case

Case Dimensions: 33.5" x 8.25" x 3.75"

Description	lb	No.
Wire and Valve Locator	12.0	521A

800.545.7698 www.rothenberger-usa.com

ROTHENBERGER

Storage

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at **1-800-545-7698**

Mobile Storage Chest

- Patented, recessed and concealed lock protectors for maximum security against drilling and cutting lock
- Enhanced lid bolster for added support and durability
- Finger-groove lid handle for easy opening
- Convenient storage tray on back wall for small items
- Steel support arms to hold lid in open position
- Heavy-duty piano hinges with non-removable pin
- Large, fold-down recessed handles for convenient lifting
- Built-in 3-1/2" high skids with holes for easy caster installation
- Optional threaded casters are available separately for easy mobility

Specifications: (2448)

Capacity: 16FT³ (.45m³)
Height: 24" (610mm)
Width: 48" (1219mm)
Depth: 24" (610mm)

Specifications: (3048)

Capacity: 25FT³ (.71m³)
Height: 30" (762mm)
Width: 48" (1219mm)
Depth: 30" (762mm)

Specifications: (1332)

Capacity: 4.9FT³
Height: 14"
Width: 32"
Depth: 19"



2448

Description	lb	No.
Mobile Storage Chest	159.0	2448
Mobile Storage Chest	183.0	3048
Mobile Storage Chest	83.0	1332
6" Swivel Casters (4)	22.0	503
6" Swivel Casters (2 rigid, 2 swivel)	20.0	603

Slant-Top Box

Specifications

Capacity: 44FT³ (1.23m³)
Height: 48" (1219mm)
Width: 60" (1524mm)
Depth: 30" (762mm)
Weight: 282lb. (128kg)

- Large capacity storage with traditional slant-top design
- Recessed and concealed lock protectors provide maximum security against drilling and cutting locks
- Channel reinforcements on lid lock side panels into lid for added security when closed
- Convenient storage tray on back wall for small items
- Hinged lower shelf enables lower storage of larger items
- Hemmed (reinforced) high-strength shelves
- Continuous, non-removable hinge pins help prevent theft
- Strategically located, easily accessible, durable gas-shocks provide for ease in opening lid
- Angled 3-1/2" high support skids
- Angled handle recess prevents pinch points
- Features two reinforced steel shelves with large lip to prevent items from rolling off
- Double-hinged cover folds up and out of the way
- Optional casters are available separately for easy mobility



3660

Description	lb	No.
Slant-Top Boxes	282.0	3660
6" Swivel Casters (4)	22.0	503
6" Swivel Casters (2 rigid, 2 swivel)	20.0	603

For more information on the full Greenlee line, visit www.Greenlee.com or call Customer Service at 1-800-545-7698

Storage

Specifications

Capacity: 50FT³ (1.42m³)
Height: 48" (1219mm)
Width: 60" (1524mm)
Depth: 30" (762mm)
Weight: 305lb. (138kg)



4860

Flat-Top Box

- Flat-top design provides more storage capacity for tall, bulky items, plus a large work surface for jobsite plans
- Recessed and concealed lock protector inhibits forced entry and corrosion to lock
- Channel reinforcements on lid lock side panels into lid for added security when closed
- Hinged lower shelf allows for easy storage of larger objects
- Angled handle recess prevents pinch points
- Hemmed (reinforced) high-strength shelves
- Continuous, non-removable hinge pins help prevent theft
- Side-wall storage
- Strategically located, easily accessible, durable gas-springs provide for ease in opening lid
- Double hinge cover folds up and out of the way
- Angled 3-1/2" high support skids
- Optional casters are available separately for easy mobility

Description	lb	No.
Flat-Top Box	305.0	4860
6" Swivel Casters (4)	22.0	503
6" Swivel Casters (2 rigid, 2 swivel)	20.0	603



5660L

Utility Cabinet

- Recessed and concealed lock protector inhibits forced entry and corrosion to lock
- Flush-mounted doors
- Finger-groove door handles
- Front-door storage
- Hemmed (reinforced) high-strength shelves
- Large, lower storage areas for bigger items
- Continuous, non-removable hinge pins help prevent theft
- Angled handle recess prevents pinch points
- Three 3-1/2" high support skids
- Weather-resistant design
- Optional casters are available separately for easy mobility

Specifications

Capacity: 46FT³ (1.3m³)
Height: 56" (1422mm)
Width: 60" (1524mm)
Depth: 24" (610mm)
Weight: 401lb. (182kg)

Description	lb	No.
Utility Cabinet	401.0	5660L
6" Swivel Casters (4)	22.0	503
6" Swivel Casters (2 rigid, 2 swivel)	20.0	603

Conduit and Pipe Storage Rack

- 7 individual bins allow you to sort by size and type
- Folds down for storage
- Casters included



668

Specifications

Capacity: 1000 lbs. (454 kg)
Dimensions: 58-1/2" (1486 mm) long x 34" (864 mm) wide x 63-1/2" (1613 mm) high
Folded Down: 58-1/2" (1486 mm) long x 34" (864 mm) wide x 19" (483 mm) high

Description	lb	No.
Conduit and Pipe Storage Rack	113.0	668

800.545.7698 www.rothenberger-usa.com



